


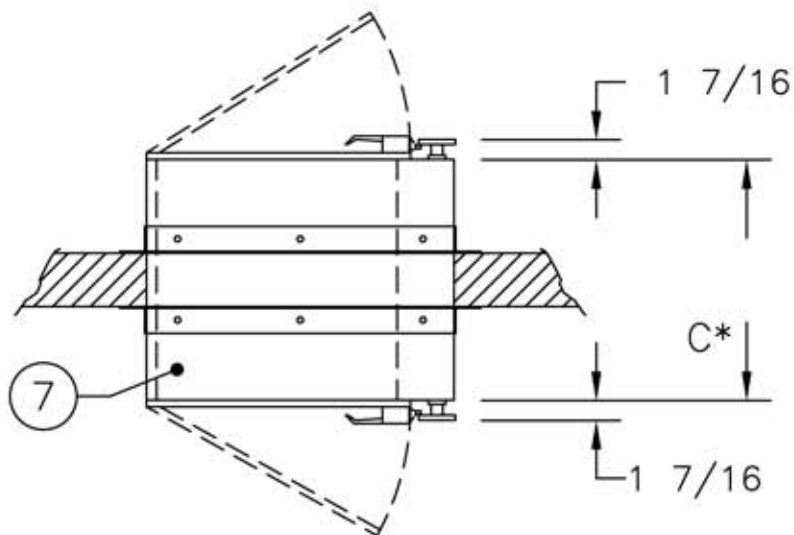

FEATURES:

1. 1/4 CLEAR ACRYLIC WINDOW
2. STAINLESS STEEL CONTINUOUS HINGE
3. STAINLESS STEEL DOOR FRAME
4. OVER CENTER DRAW LATCH
5. 90° TURN INTERLOCK LATCH
6. 8PC PERIMETER STAINLESS STEEL MOUNTING FRAME (1-5/8" X 2-3/8" ANGLE)

MATERIAL:

7. POLYPROPYLENE (PP)
- STAINLESS STEEL (SST)

WINDOW OPTIONS:



- YELLOW ACRYLIC
- POLYCARBONATE
- PVC
- ANTI-STATIC PVC
- U.V FILTERING ACRYLIC
- TEMPERED SAFETY GLASS
- NO WINDOW (SOLID SST DOOR)

NOTES:

WALL CUTOUT IS $(E+1/2)$ BY $(D+1/2)$

OPERATION - ONE HAND:

TURN KNOB (5) TO OPERATE INTERLOCK
TURN KNOB (4) TO OPEN OR CLOSE DOOR

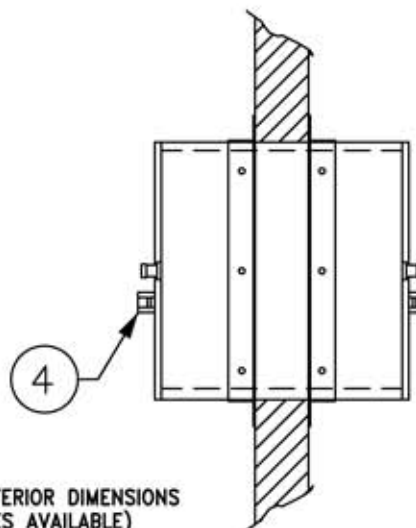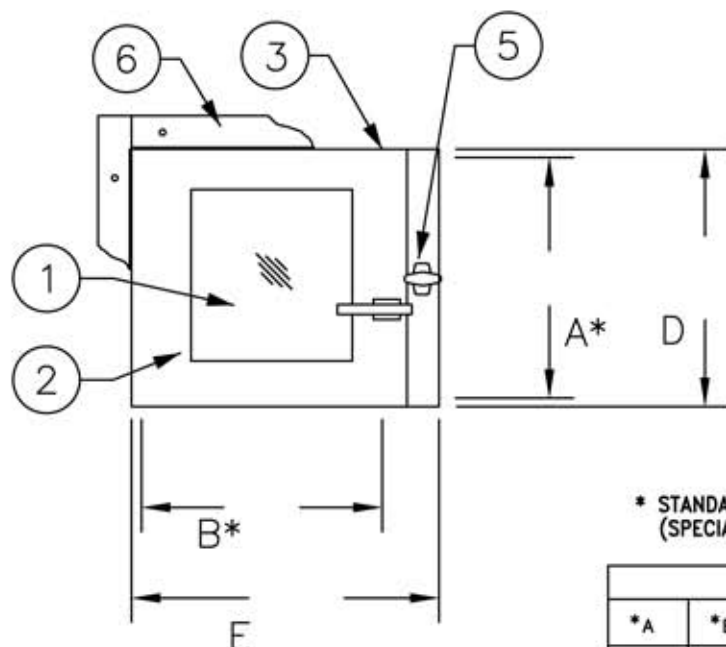

* STANDARD INTERIOR DIMENSIONS
(SPECIAL SIZES AVAILABLE)

STANDARD SIZES						
*A	*B	*C	D		E	
			SS	PP	SS	PP
30	30	30	33-1/4	31	35-1/4	34-1/2
36	36	36	39-1/4	37	41-1/4	40-1/2

PASS THRU
CAP18W — WITH INTERLOCK

DRWN BY W McG	DATE 6-12-96	QUOTE NO.
18W-Interlock — Thick Wall		C
FORM NO.		PART NO.
18W-Interlock — Thick Wall		



INNOTECH PRODUCTS INC 1045 10TH AVE SE MINNEAPOLIS, MN 55414
TOLL-FREE: 1-888-270-0458 PHONE: 612-827-6880 FAX: 612-827-0789
EMAIL: info@innotechprod.com WEB: www.innotechprod.com

NOTE: STAINLESS STEEL PASS THRU'S WILL HAVE THE SAME EXTERIOR DIM. FOR INTERLOCKING AND NON INTERLOCKING UNITS UNLESS NOTED